



# SRL SERIES

Oil Free Scroll Air Compressors

2–44 hp • 1.5–33 kW





# Sullair & Hitachi

Since 1965, Sullair air compressors have been known for their Reliability, Durability and Performance. The legacy continues now as Hitachi Global Air Power – featuring the legendary Sullair product line. Together, two titans in the industry bring experience, engineering and expertise for every compressed air need.

**RELIABILITY.  
DURABILITY.  
PERFORMANCE.**

*These are the pillars that drive the quality of Sullair compressed air solutions. It's a promise we keep with every machine we make.*

## RELIABILITY

Customers who work with Sullair compressors have found intangibles make all the difference—things like trust, confidence and peace of mind. They go to work every day having full faith in their equipment, as well as the knowledge they have access to true compressor experts ready to support them every step of the way.

## DURABILITY

Hitachi Global Air Power represents the collective strength of more than 150 years of compressor experience and the legendary durability of Sullair products. In shops and factories all around the world, our products have withstood the test of time, running consistently today as they did on day one.

## PERFORMANCE

Our vision for success is two-fold: produce clean, quality air for the job at hand, and provide cost-effective solutions for now and the long term. With high standards of efficiency for our compressors, we are committed to customer performance—especially in applications where air purity is critical.

The Hitachi Global Air Power network of engineering and quality experts continues to build next-generation, environment-forward compressed air solutions to meet the demands of today's hard-working customers.

## THE SULLAIR OIL FREE SEAL

The Sullair Oil Free Seal is your assurance the compressor produces the clean air required for your operational needs. All Sullair compressors which meet the ISO standard for Class 0 oil free air ISO 8573-1 carry the Sullair Oil Free Seal.







# OIL FREE COMPRESSION WITH SCROLL TECHNOLOGY

SRL Series scroll air compressors are the perfect choice for applications requiring oil free air, including:

- Pharmaceuticals
- Food and beverage manufacturing
- Electronics
- High-technology manufacturing
- Research & Development applications
- Robotics
- Dental applications
- Automotive
- Paint
- High quality oil-less instrument air

## Why Oil Free?

In many operations, compressed air comes into contact with items in the manufacturing process. When air purity is critical — oil free air is essential. Oil particulates in compressed air can contaminate downstream processes and production. Oil Free compressors help eliminate potential contamination as no oil or lubricant is introduced into the air compression process. Reduced risk of contamination helps improve your business operations and profitability.

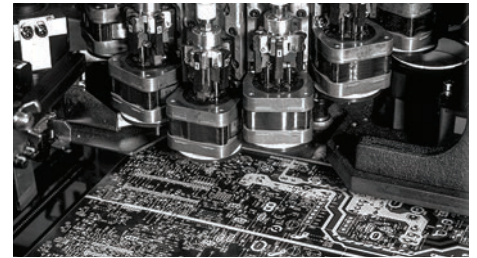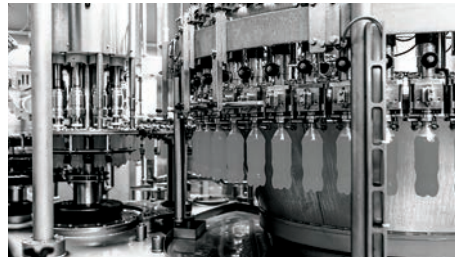

## AIR QUALITY STANDARDS ISO 8573-1 CLASSES


Class	Solid Particle Maximum number of particles per m³			Pressure Dew Point °F (°C)	Oil (incl. vapor) mg/m³
	0.1–0.5 micron	0.5–1.0 micron	1.0–5.0 micron		
0	As specified by the end-user or manufacturer, and more stringent than Class 1				
1	≤ 20,000	≤ 400	≤ 10	≤ -94° (-70°)	0.01
2	≤ 400,000	≤ 6,000	≤ 100	≤ -40° (-40°)	0.10
3	—	≤ 90,000	≤ 1,000	≤ -4° (-20°)	1.00
4	—	—	≤ 10,000	≤ 37.4° (3°)	5.00
5	—	—	≤ 100,000	≤ 44.6° (7°)	—
6	—	—	—	≤ 50° (10°)	—

**Class 0 Oil Free Air** — For applications in which air purity is essential, including pharmaceuticals, food and beverages, electronics, automotive painting, and textiles.

SRL Series compressors are tested to meet oil free requirements under ISO 8573-1.




## Common Air Contaminants

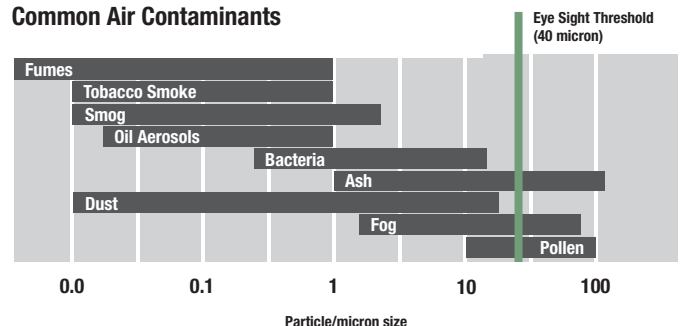

# SRL SERIES



OIL FREE SCROLL PRODUCT OVERVIEW									
Motor Output — Horsepower (hp)	2	3	5	7.5	10	15	22.5	30	44
Motor Output — Kilowatts (kW)	1.5	2.2	3.7	5.5	7.5	11	16.5	22	33
Simplex (single air pump)									
Multiplex (up to six air pumps)									
Rated Pressure (psi)	120	120–145	120	120–145	122–145	122–145	122–145	122–145	122–145
Rated Pressure (bar)	8.3	8.3-10	8.3	8.3-10	8.4-10	8.4-10	8.4-10	8.4-10	8.4-10

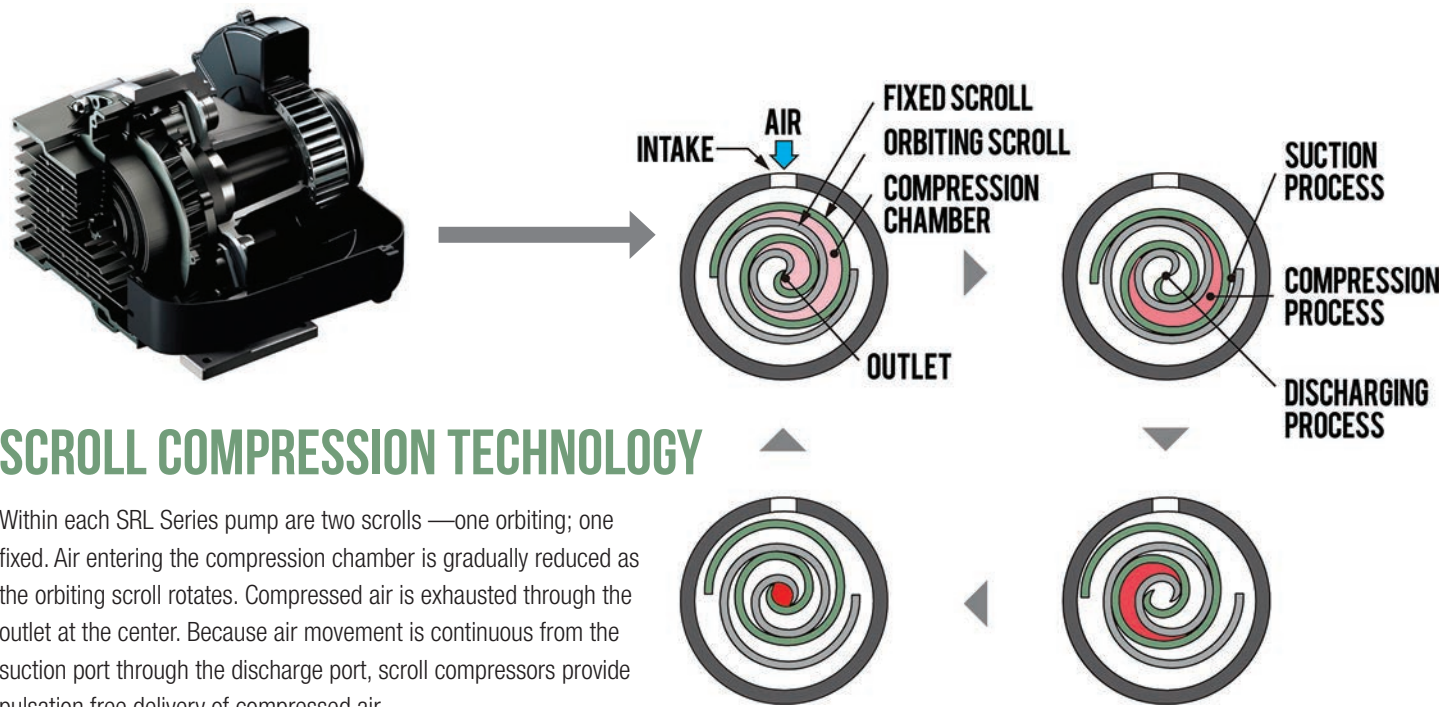

## SCROLL COMPRESSION TECHNOLOGY

Within each SRL Series pump are two scrolls —one orbiting; one fixed. Air entering the compression chamber is gradually reduced as the orbiting scroll rotates. Compressed air is exhausted through the outlet at the center. Because air movement is continuous from the suction port through the discharge port, scroll compressors provide pulsation free delivery of compressed air.


# THE SRL SERIES DIFFERENCE

The SRL Series provides oil free air reliably, efficiently and quietly!

Built on Hitachi engineering, the SRL Series represents advanced scroll compressor technology to meet your oil free compressed air needs — today and tomorrow.

## SRL EXCLUSIVE SCROLL AND PUMP DESIGN

- Patented scroll wrap design with labyrinth seal provides superior performance and reliability
- Proprietary tip seal reduces air leakage while extending service intervals
- Two air inlets to reduce stress on pump (5.5 kW pump only)
  - Leads to tighter upper air band
  - Extends life of pump
- Normal maintenance can be completed without disassembling pump

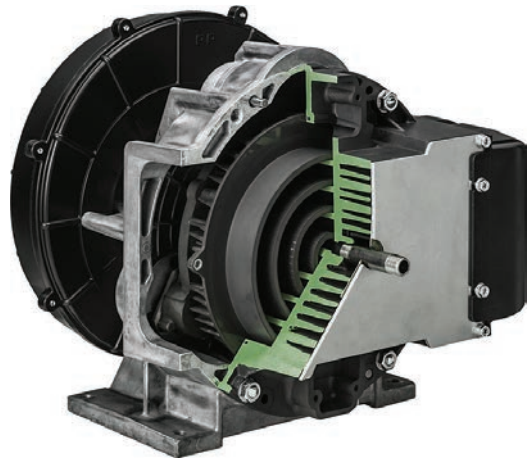

## INTEGRATED DESIGN FOR MAXIMUM USER BENEFITS

- Highly efficient cooling
  - Multi-stage cooling reduces ambient temperature out
- Receiver tank helps dissipate heat while reducing compressor starts/stops
- Air pressures to 145 psi
- Extremely quiet
  - Full enclosure standard
  - Mechanical and electrical vibration isolation
  - Designed to be placed at point of air need
  - Sound levels as low as 48 dBA
- Compact design reduces floor space needed
- Maintenance friendly
  - Easy accessibility for inspection and maintenance



US Patents: 6808373; 8628313; 8647085

# EFFICIENT COMPRESSOR OPERATIONS = ENERGY SAVINGS

Maximizing efficiency means more than just having an efficient air compressor. All SRL Series compressors feature built-in logic to help utilize the air compressors most efficiently — which not only saves wear and tear on the compressor, but also provides energy savings — which saves you money!

## Multi-Drive Control (Multiplex Units Only)


Patented multi-drive control monitors compressor operation, predicts compressed air needs, then modifies operation automatically by:

- Shutting down compressor pumps not needed
- Lowering maximum pressure setting automatically

This process saves energy by not producing unneeded air. Shifting the operating load among the available compressor pumps helps extend the life of the compressor, and Multi-Drive Control maintains necessary pressure to prevent pressure drop.


## Pressure Switch Mode

When the compressor operates in Pressure Switch Mode, the compressor pump (pumps in Multiplex units) stops automatically when the maximum pressure is reached. When the system reaches recovery pressure, each pump in the compressor restarts.

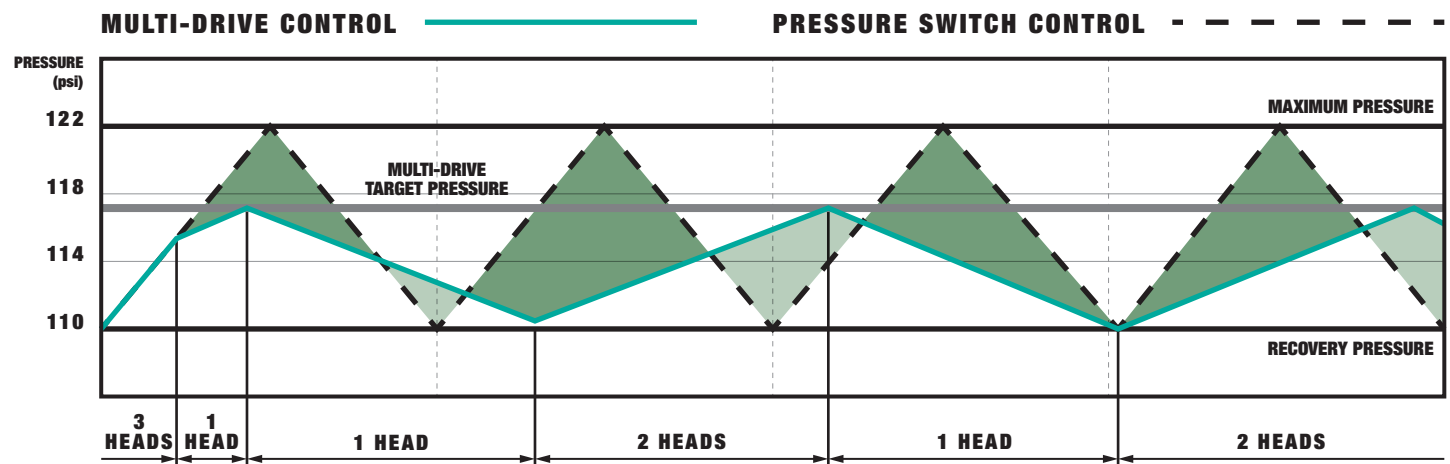

## Cycle Control Logic

Lowering maximum pressure is frequently done to save energy. However, too low a pressure can result in excessive on/off cycling, increasing wear and tear on the compressor. Cycle Control Logic automatically adjusts the maximum pressure rating to elongate on/off cycles — reducing excessive restarting.

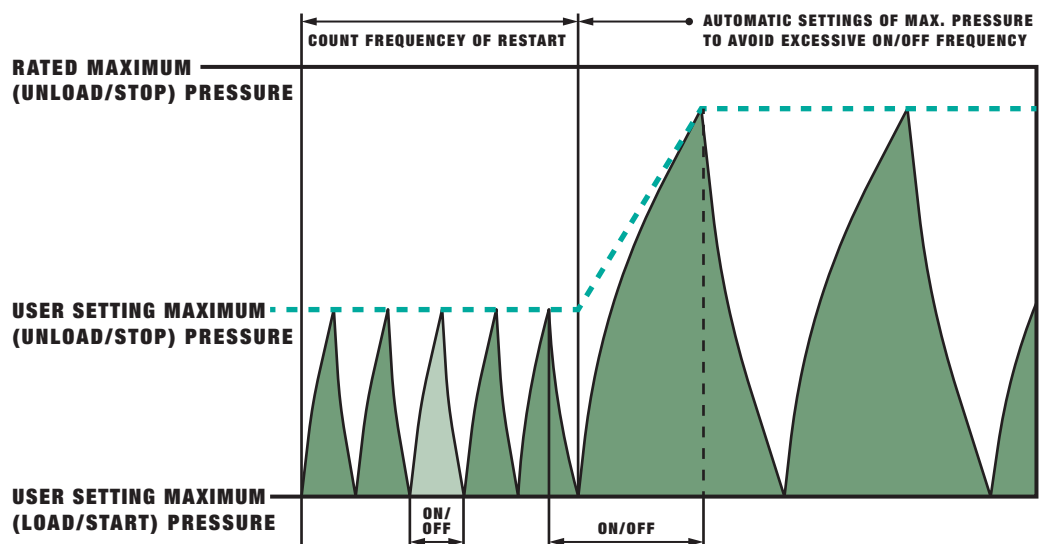





## SRL SERIES (SIMPLEX SHOWN)

1. Control Panel
2. Emergency Stop Button
3. Starter Panel
4. Condensate Drain Valve




AVAILABLE FOR THE SRL5.5 MODEL

## SRL PERFORMANCE AIR SYSTEM

The SRL Performance Air System is a comprehensive solution to help your air stay clean, dry and on the ready.

The SRL Performance Air System includes:

- Refrigerated dryer to help remove water vapor
- 80-gallon receiver tank – ASME and CRN approved
- Maximum operating temperature up to 210°F

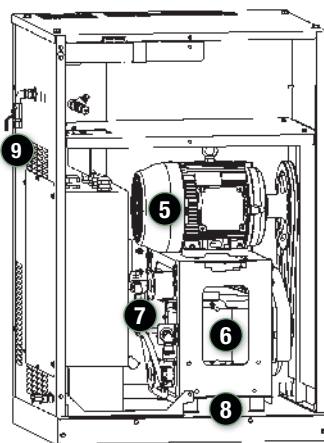


### 5. Electric Main Motor

- 2, 3, 5 or 7.5 hp
- 1800 rpm
- NEMA Premium Efficient – Severe Duty
- Simplex package – 1 motor
- Multiplex package – 1 motor per scroll pump
- TEFC standard

### 6. SRL Scroll Pump

- Simplex – 1 scroll pump
- Multiplex – up to 6 scroll pumps
- No disassembly needed for normal maintenance

### 7. Intake Air Filter

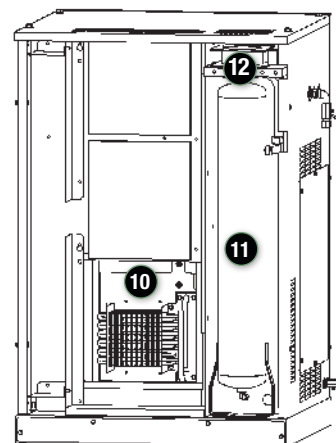

### 8. Rubber Vibration Isolators — help reduce vibration and operating noise

### 9. Discharge Stop Valve

**Multi-Stage Cooling Reduces Need for High Temp Dryers**

### 10. Primary Aftercooler


### 11. Air Receiver Tank

- Helps dissipate heat
- Reduces starts and stops, which helps reduce stress on scroll pump

### 12. Ventilating Fan — provides secondary aftercooling

## SRL SERIES — CONTROLLER

1. **Digital Display** — shows discharge pressure; total run hours; alarm/errors (if applicable)
2. **Indicator Lights** — top = Discharge Pressure (psi); bottom = Operating Time (x10 Hours)
3. **Screen Shift Switch** — toggles display
4. **Compressor Operation Light** — shows green while compressor is in operation
5. **Control Mode Switch (Multiplex Models Only)** — changes compressor control modes
6. **Maintenance Alert** — Light shows when maintenance intervals have been reached
7. **Compressor Start/Stop Switches**

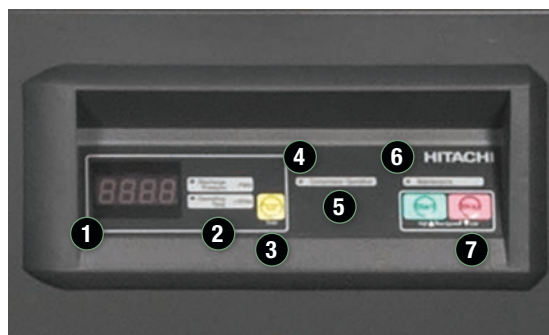

# TECHNICAL SPECIFICATIONS

FOR MORE INFORMATION, CONTACT YOUR  
LOCAL AUTHORIZED SULLAIR DISTRIBUTOR.



Scan to view the  
full Oil Free line.

SRL SERIES — 60 Hz											
Pump	Model	hp	kW	Rated Pressure (psi)	Performance (cfm)*	Performance (m³/min)*	Outlet (NPT)	Weight lbs (kg)	Width in (mm)	Depth in (mm)	Height in (mm)
Simplex	SRL1.5	2	1.5	120	5.7	0.2	3⁄8	373 (169)	27 (695)	28 (700)	45 (1145)
	SRL2.2	3	2.2	120-145	8.5	0.2	3⁄8	406 (184)			
	SRL3.7	5	3.7	120	14.1	0.4	3⁄8	485 (220)	31 (800)	30 (750)	47 (1190)
	SRL5.5	7.5	5.5	120-145	21.2	0.6	3⁄8	551 (250)			
Multiplex	SRL7.5	10	7.5	122-145	30.2	0.9	3⁄4	888 (403)	42.5 (1080)	30.3 (770)	53 (1345)
	SRL11	15	11	122-145	43.1	1.2	3⁄4	992 (450)			
	SRL16.5	22	16.5	122-145	64.6	1.8	1	1367 (620)	54.3 (1380)	30.3 (770)	58.9 (1495)
	SRL22	30	22	122-145	86.2	2.4	1 1⁄2	2249 (1020)			
	SRL33	44	33	122-145	129.3	3.7	1 1⁄2	2778 (1260)	58.9 (1495)	57.9 (1470)	59.1 (1500)

\* Performance specifications at lowest pressure rating

Tank Mount with Dryer								
Model	Length		Width		Height		Weight	
	in	mm	in	mm	in	mm	lbs	kg
SRL5.5	72	1831	31	783	73	1857	1023	464

## QUIET OPERATION

SRL Series compressors are not just quiet — they are super quiet. Noise levels as low as 48 dBA make Sullair SRL Series compressors suitable for indoor applications and do not require a separate sound attenuated room. In fact, these compressors may be installed at point-of-use which results in lower installation and piping costs.

### Comparative Noise Levels

dBA		dBA	
40	Library	85	Noisy restaurant
<b>As low as 48</b>	<b>SRL Series</b>	90	Tractor
50	Rainfall	100	Factory machinery
55	Coffee percolator	110	Leaf blower
60	Sewing machine	120	Thunder
70	Freeway traffic	130	Jackhammer
80	Doorbell		

Source: Center for Hearing and Communication

